
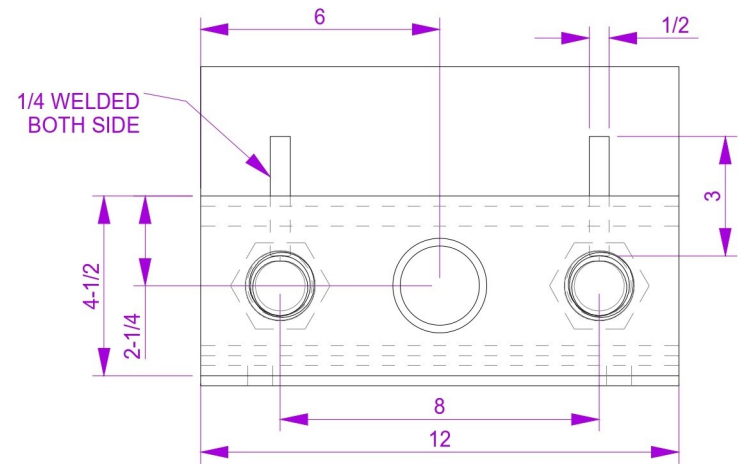
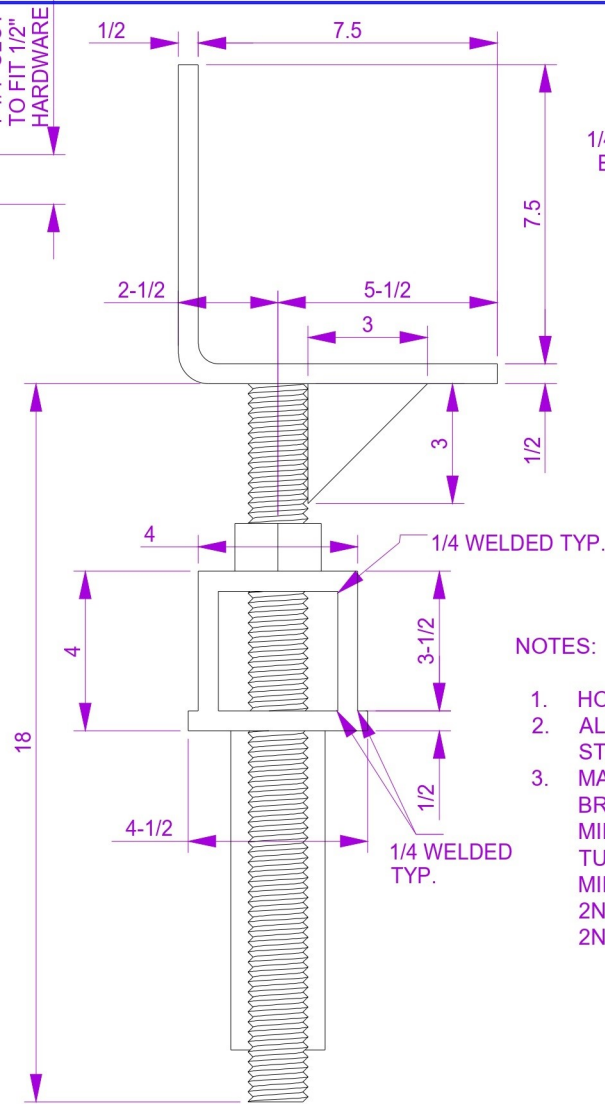


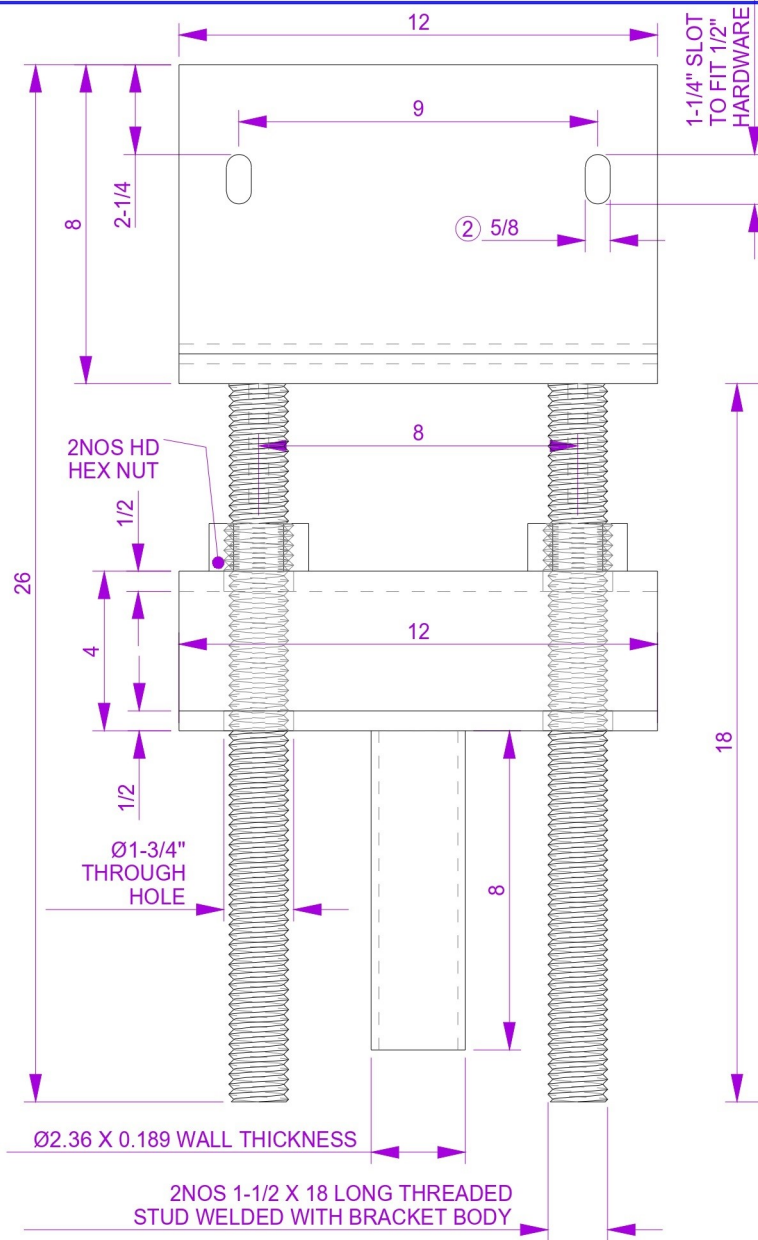

NOTES:

1. HOT DIP GALVANIZE PER ASTM A123.
2. ALL WELDING TO BE PERFORMED BY SHOP QUALIFIED TO AWS D1.1 STRUCTURAL CODE - STEEL.
3. MATERIAL SPECIFICATIONS:
BRACKET BODY & T-TYPE 1/2" THICK AS PER ASTM A572 GRADE 50;
MINIMUM YIELD STRENGTH 345 MPA & ULTIMATE TENSILE STRENGTH 450 MPA.
TUBE BODY Ø2.36" X WALL THICKNESS 0.189" AS PER ASTM A500 GRADE-C;
MINIMUM YIELD STRENGTH 345 MPA & ULTIMATE TENSILE STRENGTH 425 MPA.
2NOS 1.5" X 18" LONG THREADED STUDS AS PER ASTM A193 GRADE B7 &
2NOS HD HEX NUT AS PER ASTM A194 GRADE 2H.

02	SLOT SIZE UPDATE FROM $\frac{3}{4}$ " TO $\frac{5}{8}$ "	17.01.25
01	NOTE SECTION UPDATED	06.06.24
REV.NO.	REVISIONS	DATE

SPEC.	SEE NOTE	TITLE DJ - BRACKET [LIFT BRACKET PRO 2.36" PIPE INCLUDING ACCESSORIES]	ALL DIMENSION ARE IN INCH UNLESS SPECIFIED	
MATERIAL	SEE NOTE		WEIGHT	PROJECTION 
COATING	SEE NOTE			
		DRAWING NO. : S-2807	SCALE - NTS	SHT: 1 of 1
APP BY				
CHEKD BY				
DRAWN BY	S.S.	21.07.26		
	NAME	DATE		